


SMD LED DISPLAY

MODEL : HLGWF239SE-A2

FEATURES

- dual SMD display
- high intensity and reliability
- high quality, Low power requirement
- IC compatible , Easy assembl

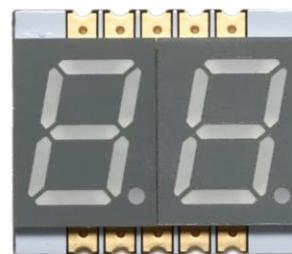

SPECIFICATIONS

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)


PARAMETER	COLOR	Max	UNIT
Power Dissipation Per Segment	new amber	60	mW
Peak Forward Current Per Segment (1/10duty cycle ,1KHz)	new amber	100	mA
Average Forward Current Per Segment	new amber	25	mA
Derating Linear From 25°C Per Segment	new amber	0.33	mA/°C
Reverse Voltage Per Segment	new amber	5	V
Operating Temperature Range		-35°C to + 85°C	
Storage Temperature Range		-35°C to + 85°C	
Lead Soldering Temperature 260°C at 1.6mm From Body for 3 second			

ELECTRICAL/OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	COLOR	MIN.	TYP.	MAX.	UNIT	Test condition
Luminous Intensity Per Segment	I _v	new amber	3	5	—	mcd	I _F =10mA
Dominant Wavelength	λ _D	new amber	—	624	—	nm	I _F =20mA
Spectral Line Half-Width	Δλ	new amber	—	30	—	nm	I _F =20mA
Forward Voltage Per Segment	V _F	new amber	—	2	2.3	V	I _F =20mA
Reverse Current Per Segment	I _R	—	—	—	100	μA	V _R =5V
Luminous Intensity Matching Ratio (Segment To Segment)	I _{v-m}	—	—	—	2 : 1	—	I _F =10mA

LED DISPLAY

DIMENSIONS

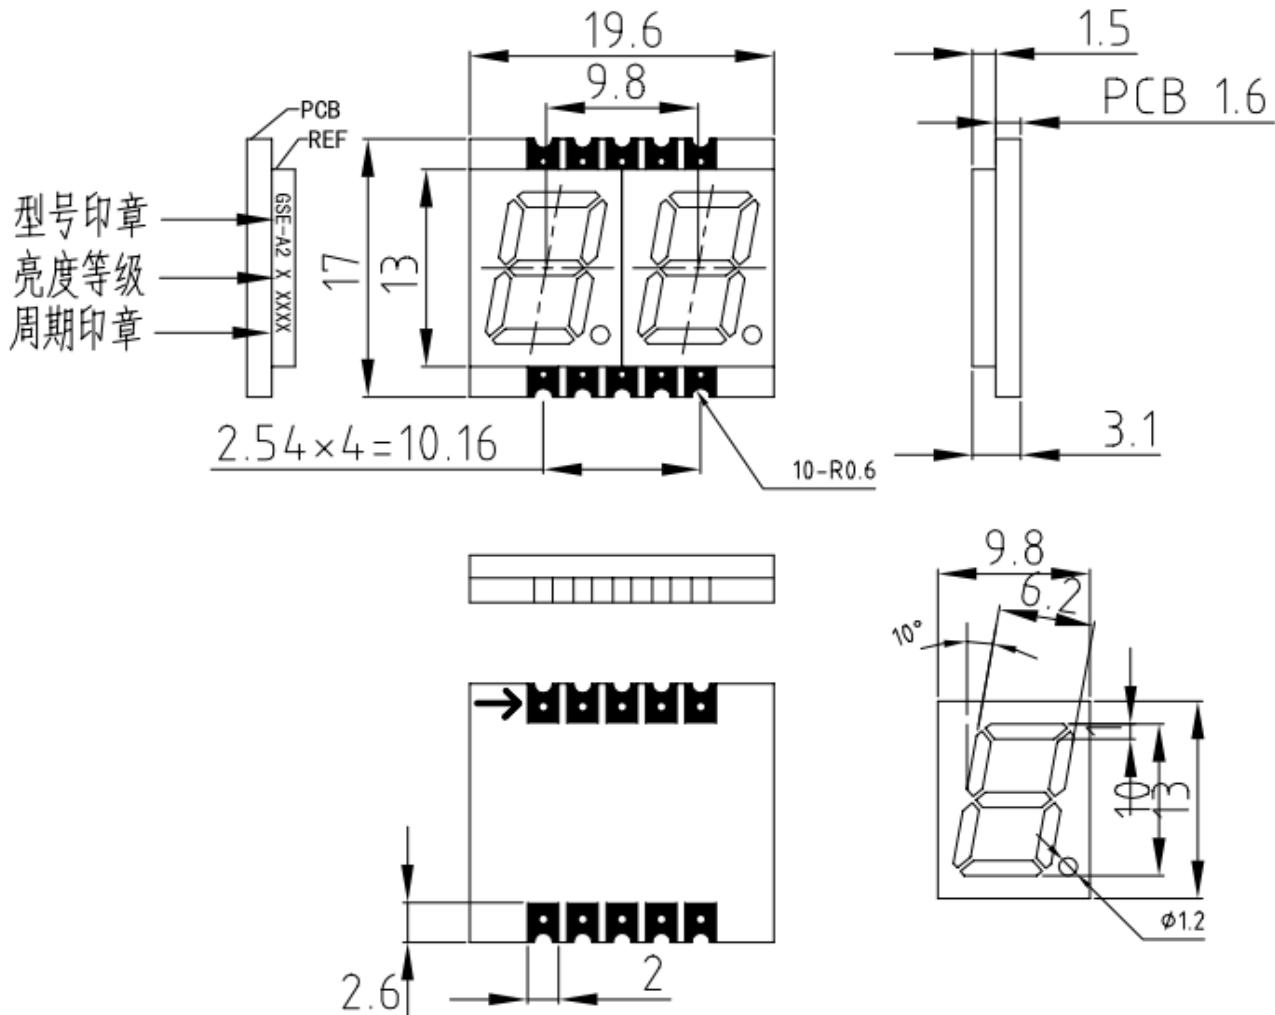

NOTES : All dimensions are in millimeters (inches) tolerance are $\pm 0.25\text{mm}(0.010)$ unless otherwise noted